






# TAB-LED series


LED HYMN BOARDS FOR CHURCHES

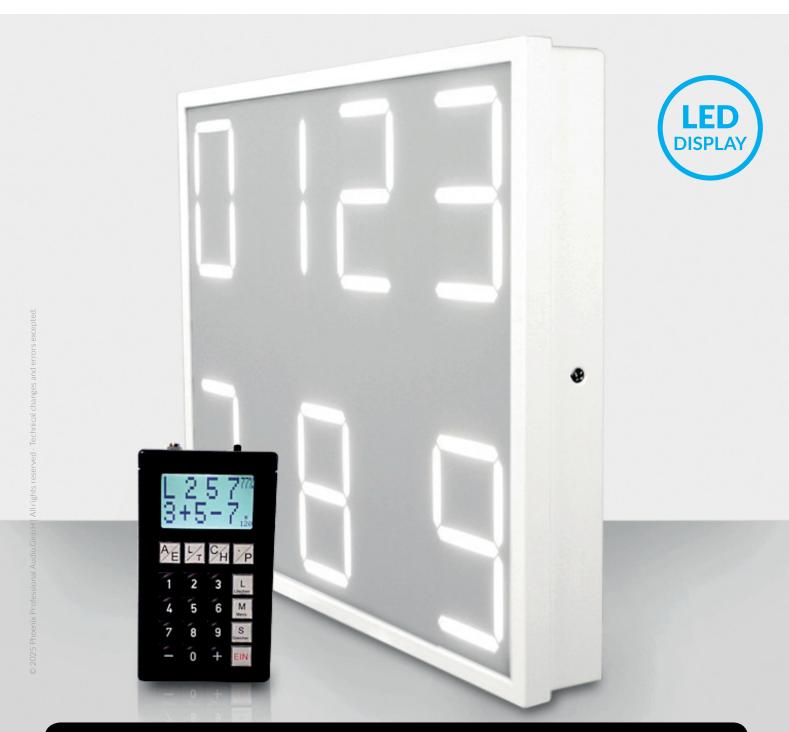







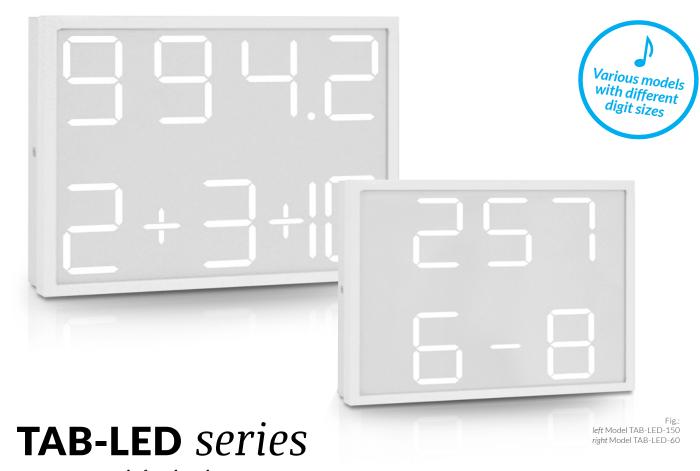

LED Hymn Boards for Churches

## LED DISPLAY VERY FLAT HOUSING RAZOR-SHARP DISPLAY

Hymn boards with LED display in a stable aluminum housing for surface mounting with numerous accessories.

Thanks to their elegant, flat housing, the TAB-LED hymn boards for churches and communities fit harmoniously into the spatial architecture. The front of the hymn board has a glare-free coating. The song numbers or verses on the front of the board are evenly lit and therefore easy to read - even when viewed from the side.

Depending on the model, the series is designed for **distances** from 5 to approx. 70 meters and offers three different digit sizes (number height 150, 100 and 60 mm, depending on the model).

#### ModelS

TAB-LED-60 ......LED Hymn Board / Digit height 60 mm for smaller distances up to approx. 20 meters

TAB-LED-100...LED Hymn Board / Digit height 100 mm for distances up to approx. 40 meters

TAB-LED-150...LED Hymn Board / Digit height 150 mm for larger distances up to approx. 70 meters

- Very flat light board
- Energy-saving LED technology
- Excellent readability even from greater distances and from side view
- Razor-sharp display of songs & verses
- Easy brightness control
- Integrated lightning protection
- Stable ALU housing
- User-friendly operation

The **brightness** is **controlled** automatically via **the ambient sensor** in the hymn board. Alternatively, the board can be **dimmed** using the optionally available radio remote **control TAB-CONTROL-R**.

Song numbers / verses are **displayed in white**. <u>On request</u>, we also offer our TAB-LED hymn boards with numeric displays in red and yellow. Specials



TAB-LED series - Continued from previous page



**TAB-LED** series


The **stable ALU housing** of the TAB-LED hymn boards is powder-coated in white RAL 9016 matt. <u>On request</u>, the hymn boards can also be delivered in other RAL colors.

A special switching technology (electronic SOFT START) ensures an **extra long lifespan for the LED**.

The TAB-LED hymn boards are powered by **230 VAC**. Operation with 110 VAC is possible on request.

Each hymn board has built-in lightning protection.

#### **OPTIONAL ACCESSORIES:**



#### Wall swivel holder

Optional TAB-LED accessories include the manual wall swivel holder TAB-WS-M and the automatic wall swivel holder TAB-WS-E with electric drive and wireless remote control.

#### Wireless remote control

The hymn boards can be conveniently controlled wirelessly using the separately available <u>radio remote control TAB-CONTROL-R</u> (dimensions: W-33.5 x H-88 x L-152 mm).

The display (2 lines) of the radio remote control shows numbers large and very easy to read and has a continuously adjustable automatic switch-off (the remaining expiry time is shown in the display). There are 50 storage spaces available.

The control panel is powered by **2 built-in NiMH batteries** (AA 1.2 V). The **battery level** is shown in the display in percent. A **mains charger** is included. The radio remote control works

wirelessly via a built-in 868 MHz radio transmitter module, with a range of approx. 300 m.

#### Wireless receiver

For the purposes of the wireless connection between the hymn board and the radio remote control, the TAB-DLF wireless radio receiver is installed in the TAB-LED hymn board. The radio receiver is available separately.

#### Flush-mounted housing

The TAB LED hymn boards are also optionally available for **flush-mounting** with the corresponding **TAB-UP flush-mounted housing**.

- 1
Fig.: Flush-mounted housing TAB-UP-60

Technical data	TAB-LED-60	TAB-LED-100	TAB-LED-150
Weight	approx. 3.5 kg	approx. 5 kg	approx. 7 kg
Distance	up to 20 m	up to 40 m	up to 70 m
Dimensions (Wx HxL in mm)	300×210×40	400x300x40	570x440x40
Digit height	60 mm	100 mm	150 mm

### Accessories (optional)

TAB-WS-M	Manual wall swivel holder
TAB-WS-E	Electric wall swivel holder
TAB-CONTROL-R	Radio remote control
TAB-DLF	Radio receiver
TAB-UP	Flush-mounted housing









www.phoenix-pa.com • www.phoenix-pa.com/shop

Tel.: +49 (0) 8062 908 49 84 | Fax: +49 (0) 8062 728 37 37 | E-Mail: info@phoenix-pa.com

## PHOENIX PROFESSIONAL AUDIO GMBH

Hermann-Oberth-Str. 12 D-83052 Bruckmühl Germany